



# NC9115/NC9125/NC9135

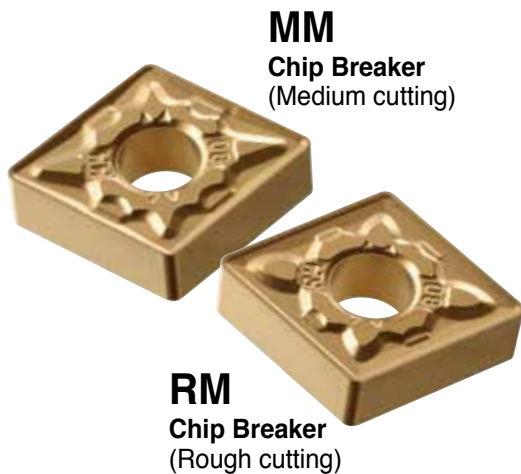

## CVD Coated Turning Inserts for Stainless Steel

- **Increased Productivity**  
Extended tool life at high speeds, feeds, and depths of cut
- **Comprehensive Use**  
A wide grade lineup for most workpiece sizes and types, including heavy interruption (NC9115/NC9125/NC9135)
- **Solutions for Most Common Issues in Stainless Steel Machining**  
Prevents built-up edge, notch wear, plastic deformation, and burr creation

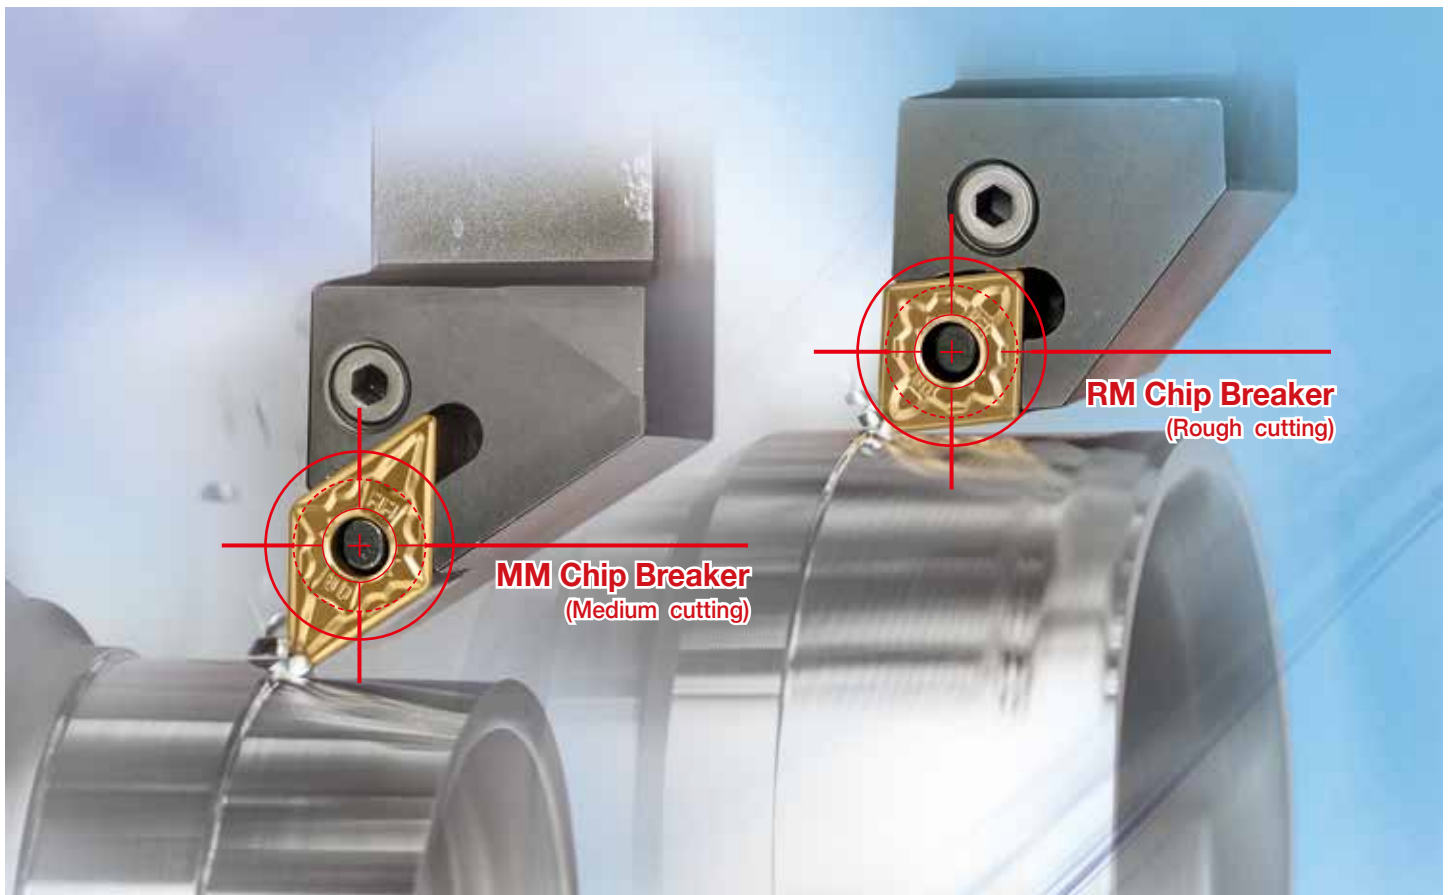

## High-performance Turning Grade and Chip Breaker for Austenitic, Martensitic, and Ferritic Stainless Steel

Stainless steels can be roughly divided into three types - the austenite, the martensite and the ferrite. They feature smooth surfaces and excellent corrosion resistance. Their use typically requires no need for surface paints or colors. The most commonly used stainless steels are high hardness types such as 13Cr, 18Cr, 18Cr-8Ni, etc.



**MM Chip Breaker**

Medium  
cutting




**RM Chip Breaker**

Rough  
cutting

The reason Stainless Steel is often considered a hard-to-cut material is its large shearing resistance that can easily cause work hardening, built-up edges, and edge fracture. Its combination of tough and hard material characteristics require the prudent selection of grades and chip breakers. These challenges led KORLOY to develop the CVD coated turning grade series, NC9115/NC9125/NC9135 along with new chip breakers MM (for medium cutting) and RM (for roughing). **The NC9100 Series** can solve most Stainless Steel machining problems with its combination of three layers – the top coat protects against welding, the coating layers protect against wear even at high speeds over 150m/min, and the tough substrate against chipping.


**The MM chip breaker** for medium cutting is the 1st recommended for stainless steel. Its dual angle land design allows for both sharp cutting performance and strong cutting edges, which promotes extended tool life and minimized cutting force and built-up edge. In addition, wide chip pockets prevent chips from interrupting the minor cutting edges and instead lets the chips out of the cutting area. These chip breaker features help prevent plastic deformation and excessive wear.

**The RM chip breaker** for roughing is recommended in rough machining and in cases where burrs are an issue. It has a wide land and rake angle lowering cutting resistance. Cutting heats can flow around the gentle slope of rake surface and can be effectively dispersed and evacuated at high feeds and high depths of cut.

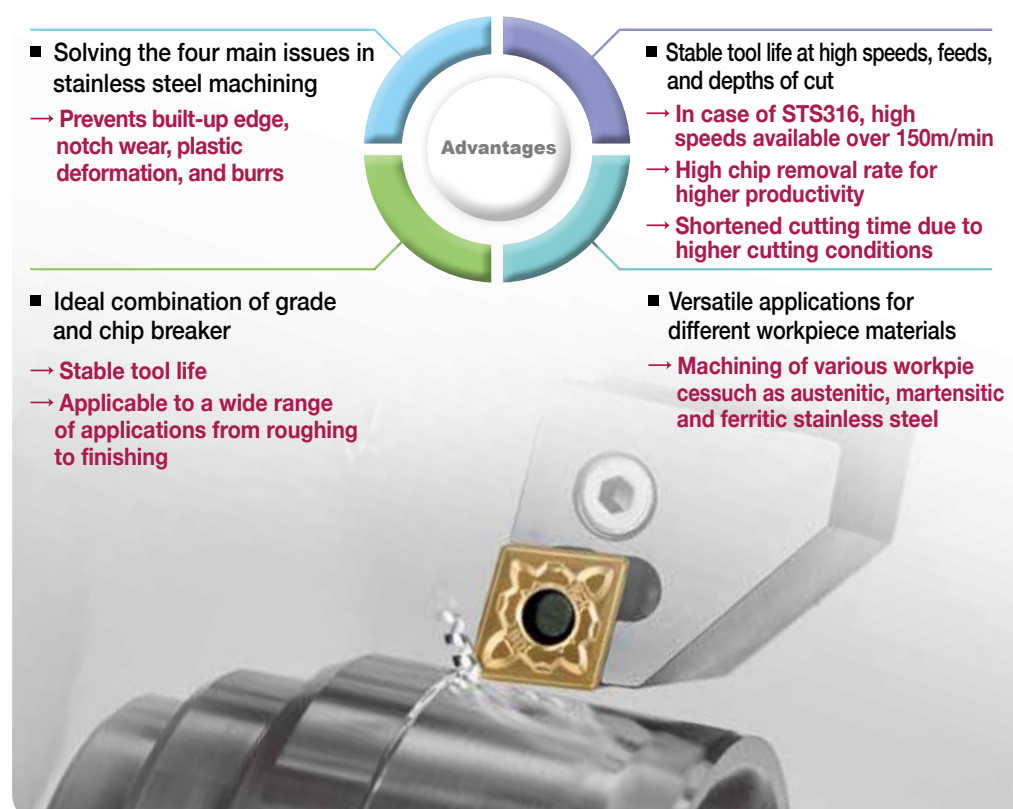

## Common Problems when Machining Stainless Steel

- Sheared chips impact cutting edges repeatedly and cause edge damage.
- Difficult chip breakage leads to built-up edge, work hardening, and promotes excessive notch wear.




• Low heat conductivity in stainless steel machining involves high cutting heat and shear chips, all of which are **concentrated on the cutting edge**

### 1. Built-up edge



### 2. Notch wear

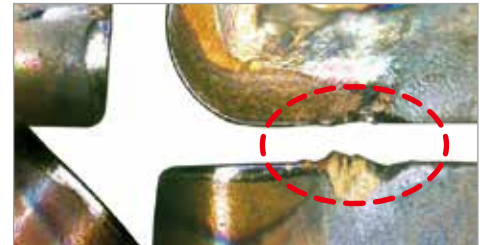


## NC9100 Series (NC9115/NC9125/NC9135) Development


- Excellent coating film for medium/rough turning of stainless steel
- Optimized substrate for different cutting speeds, feeds, and degrees of interruption

• The NC9100 series shows improved surface finish compared to the existing coating film

### Lubricative coating layer to prevent built-up edge





[ NC9100 Series ]



[ Existing coating ]

### Grade lineup

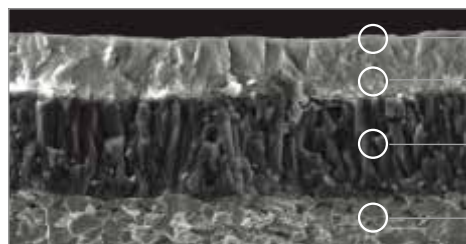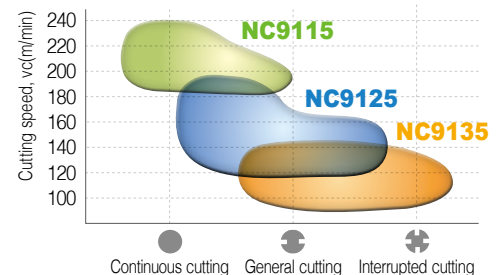

- ① Top coat with higher welding resistance
- ② Alumina layer for high speed machining
- ③ MT CVD-TiCN layer with higher chipping resistance
- ④ High toughness substrate optimal for all continuous/low or high interrupted machining

## Development Effects

• Improved chipping resistance and high toughness substrate  
→ **Reduces notch wear**

• Lubricative coating film  
→ **Higher welding resistance**

### 1. Inhibited built-up edge and blade damage




[ NC9125 (M25) ]




[ Competitor (M25) ]

### 2. Inhibited notch wear and relief surface wear



[ NC9135 (M35) ]







[ Competitor (M35) ]

## MM Chip Breaker (For medium cutting)


M

- The 1<sup>st</sup> recommended chip breaker for stainless steel machining
- Sharp cutting performance and insert toughness achieved by the use of a dual land
- Wide chip pockets for stable chip evacuation at high feeds/depths of cut

### MM Chip Breaker Features

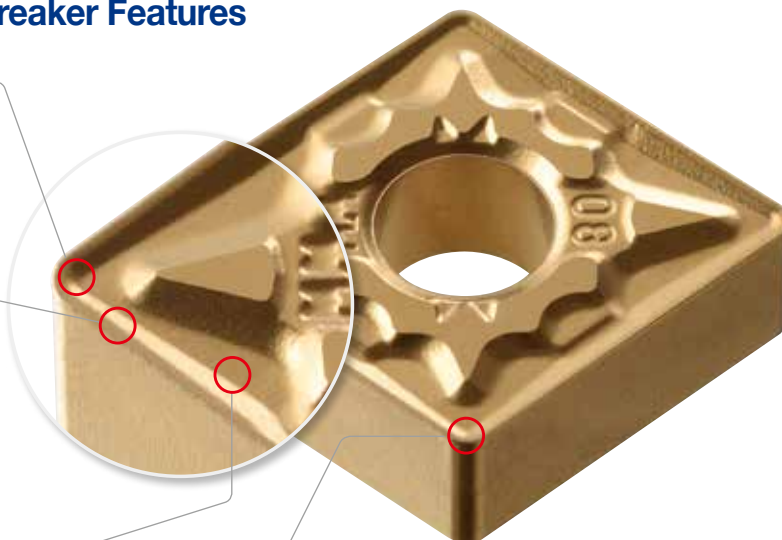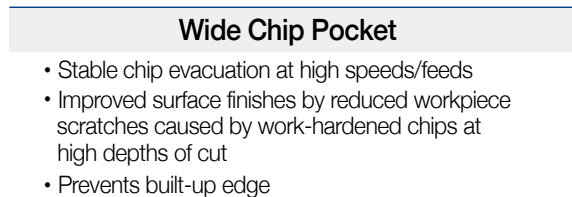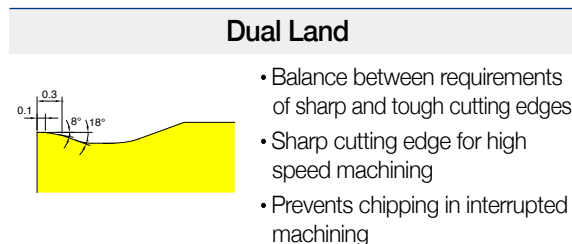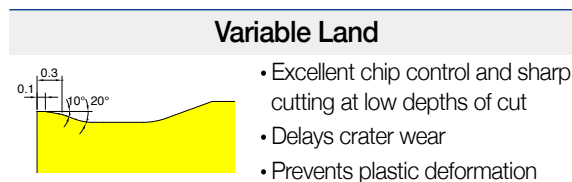

### Low Cutting Force at 100° corner



- 100° corner angle is recommended for roughing outer diameters and preventing burrs
- Reduced cutting load for high feed machining

#### [Chip Breaker Code]

MM


##### Workpiece range

- P : Steel
- **M : Stainless Steel**
- K : Cast iron


##### Application range

- F : Finish
- **M : Medium**
- R : Rough

### Application Range

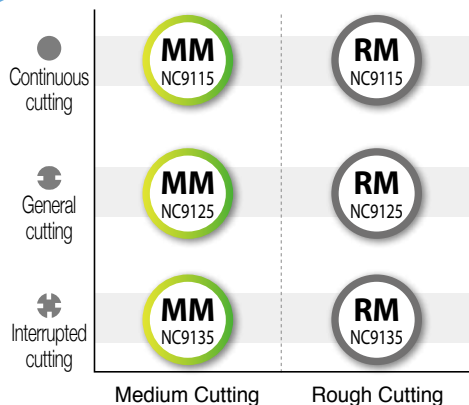

### Recommended Cutting Range

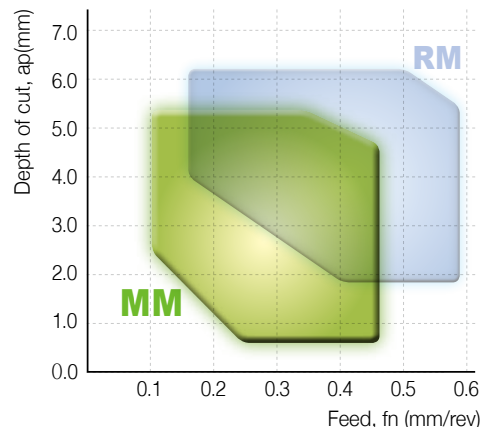

### Recommended Cutting Conditions

Application	Chip breaker	Recommended Cutting conditions					
		Depth of cut, $a_p$ (mm)			Feed, $f_n$ (mm/rev)		
		Min.	Recommended	Max.	Min.	Recommended	Max.
Medium cutting	MM	0.5	3.0	5.5	0.12	0.25	0.45







## RM Chip Breaker (For rough cutting)

**M**

- The 1<sup>st</sup> recommended chip breaker for rough and interrupted machining of stainless steel
- Prevents notch wear and burrs at high feeds and depths of cut
- Reduced cutting force extends tool life in high feed machining

### RM Chip Breaker Features

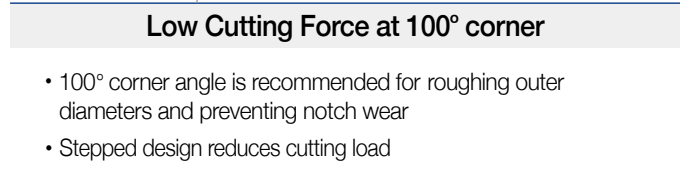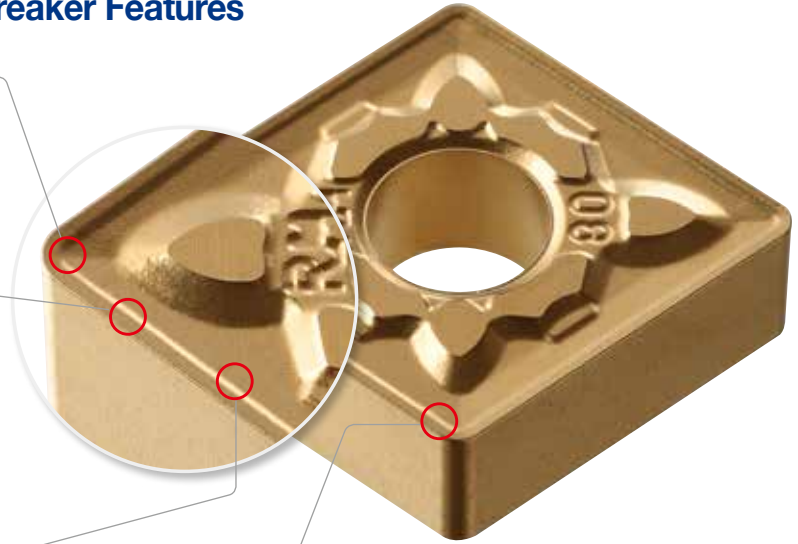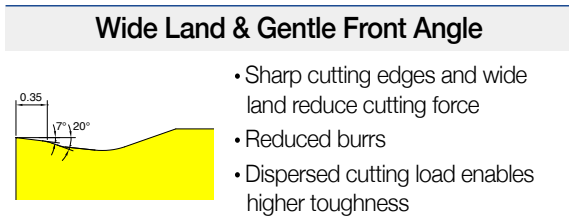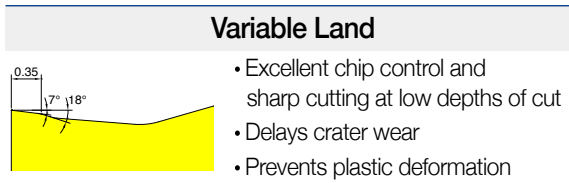

#### [Chip Breaker Code]

**R M**


**Workpiece range**

- P : Steel
- **M : Stainless Steel**
- K : Cast iron


**Application range**

- F : Finish
- M : Medium
- **R : Rough**

### Application Range

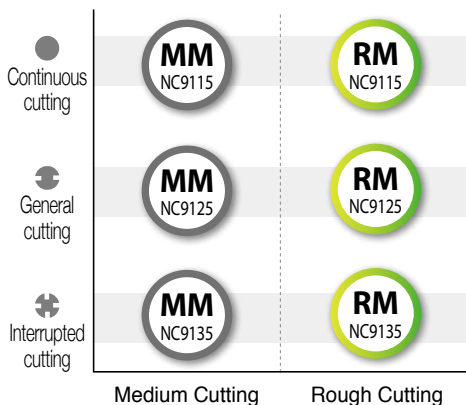

### Recommended Cutting Range

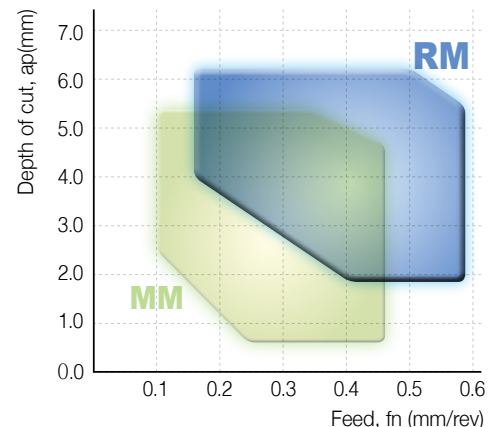

### Recommended Cutting Conditions

Application	Chip breaker	Recommended Cutting conditions					
		Depth of cut, $a_p$ (mm)			Feed, $f_n$ (mm/rev)		
		Min.	Recommended	Max.	Min.	Recommended	Max.
Rough cutting	RM	2.0	4.0	6.0	0.15	0.3	0.55

## ➤ Cutting Performance

• A gentle slope of MM chip breaker **minimizes built-up edge**

• Improved surface finish and **chip control** from inhibited built-up edges

### Built-up edge


- Workpiece X6CrAl13 (Ferrite)
- Cutting conditions  $vc(m/min) = 180$ ,  $fn(mm/rev) = 0.3$ ,  $ap(mm) = 3.0$ , wet
- Tools Insert CNMG120408-MM (NC9125) Holder PCLNL2525-M12



[ MM (NC9125) ]



[ Competitor ]

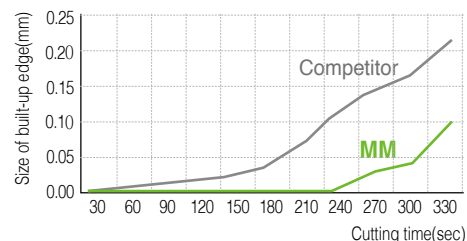

• A wide land and rake angle of RM chip breaker **disperse cutting loads and prevents notch wear**

• Improved surface finish and **reduced burrs** by preventing notch wear

### Notch wear


- Workpiece X12Cr13 (Martensite)
- Cutting conditions  $vc(m/min) = 150$ ,  $fn(mm/rev) = 0.25$ ,  $ap(mm) = 3.0$ , wet
- Tools Insert CNMG120408-RM (NC9115) Holder PCLNL2525-M12



[ RM (NC9115) ]



[ Competitor ]

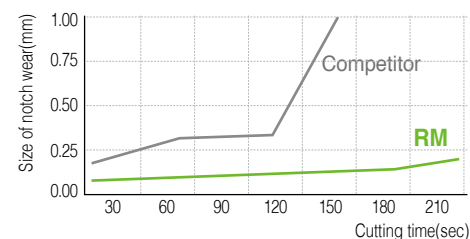

• The MM chip breaker promptly dissipates the concentrated cutting edge heat to **prevent plastic deformation** during machining


• Less vibration and cutting load due to reduced plastic deformation

### Plastic deformation


- Workpiece X5CrNiMo17-12-2 (Austenite)
- Cutting conditions  $vc(m/min) = 200$ ,  $fn(mm/rev) = 0.35$ ,  $ap(mm) = 2.0$ , dry
- Tools Insert CNMG120408-MM (NC9135) Holder PCLNL2525-M12



[ MM (NC9135) ]



[ Competitor ]

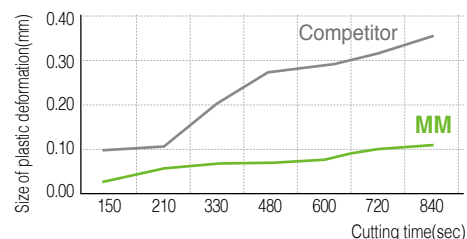

• The wide land and rake angle of the RM chip breaker **improves cutting performance and prevents burrs**

• Improved chip control improves surface finish and **extends tool life**

### Burr


- Workpiece Duplex
- Cutting conditions  $vc(m/min) = 120$ ,  $fn(mm/rev) = 0.2$ ,  $ap(mm) = 2.0$ , dry
- Tools Insert CNMG120408-RM (NC9125) Holder PCLNL2525-M12



[ RM (NC9125) ]



[ Competitor ]

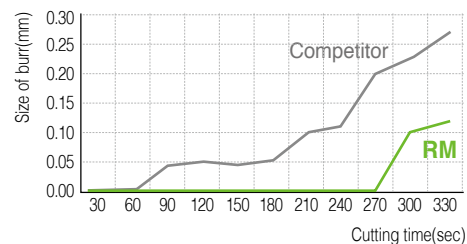

## ➔ Recommended Grade and Chip Breaker per Stainless Steel Type

• Machinability is related to the type of stainless steel.

• The Ferritic and the Martensite types are more machinable.

• The Duplex and PH types are the most difficult type to machine.

### Austenitic Stainless Steel

- Heavy work hardening (Edge chipping accelerates wear)
- Poor heat conductivity (Three times lower than carbon steel → Increase in cutting area temperature)
- High ductility (Strong chance for deformation at high temperature → Long chips or tough chips occurs)
- Type : X10CrNiS18-9, X5CrNi18-9, X5CrNiMo17-12-2 etc.

Grade	Cutting speed(m/min)				
	50	100	150	200	250
NC9115				160	220
NC9125				150	200
NC9135			100	150	

Continuous	Low interrupted	High interrupted
MM / RM	MM	-
MM / RM	MM / RM	RM
MM / RM	MM / RM	RM

### Ferritic / Martensitic Stainless Steel

- Strong chance for work hardening at high temperature (Crater wear is promoted)
- High toughness through tempering and annealing (Long chips are easily created)
- High carbon contents increase its hardness)
- Type : X20Cr13, X12Cr13, X12CrS13, X70CrMo15 etc.

Grade	Cutting speed(m/min)				
	50	100	150	200	250
NC9115				150	250
NC9125			120		220
NC9135			100	150	

Continuous	Low interrupted	High interrupted
MM / RM	MM	-
MM / RM	MM / RM	RM
MM / RM	MM / RM	RM

### Duplex Stainless Steel

- Its presence of both austenitic and ferritic fine matrix requires both types of cutting characteristics for each material's attribute.
- One of the most hard to cut stainless steels as its higher yield strength makes chip control harder than the Austenite
- Type : FeMi35Cr20Cu4Mo2\*, X2CrNiMoN22.5.3\*, X2CrNiMoN25.7.4\*

Grade	Cutting speed(m/min)				
	50	100	150	200	250
NC9115			120	160	
NC9125			100	140	
NC9135		60	100		

Continuous	Low interrupted	High interrupted
MM / RM	MM	-
MM / RM	MM / RM	RM
MM / RM	MM / RM	RM

\* Germany [DIN]

### Precipitation Hardened(PH) Stainless Steel


- High tensile strength (2 times higher than other stainless steels) increases cutting load
- Low heat conductivity cause cutting edge damage from high temp chips
- Type : X5CrNiCuNb16-4, X7CrNiAl17-7

Grade	Cutting speed(m/min)				
	50	100	150	200	250
NC9115		50	110		
NC9125		40	110		
NC9135		30	100		

Continuous	Low interrupted	High interrupted
MM / RM	MM	-
MM / RM	MM / RM	RM
MM / RM	MM / RM	RM

## NC9115/NC9125/NC9135

### Grade Lineup

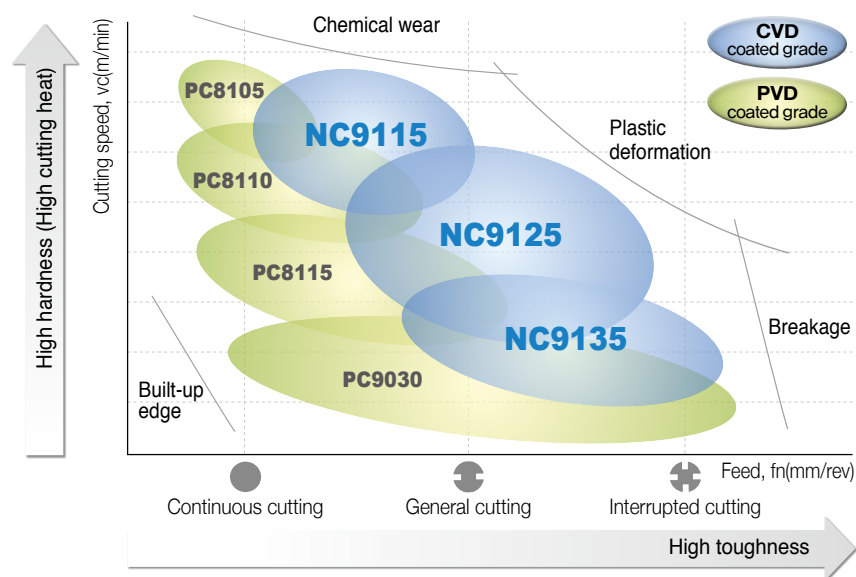

### Chip Removal Volume per Cutting Speed

Grade	ISO	Cutting speed (m/min)	Chip removal volume (cm <sup>3</sup> )
NC9135	M35	150	212
PVD coated grade	M30		256
Competitor	M35		126
NC9135	M35	200	126
PVD coated grade	M30		56
Competitor	M35		66

→ Higher productivity than PVD grades at high speeds over 150m/min

- The NC9100 Series CVD coated grades are differentiated from PVD grades by their application range
- Compared to PVD coated grades with similar substrates, CVD coated ones have longer tool life over the PVD, in large scale rough machining at high speeds or in high temperature conditions
- The NC9115/NC9125/NC9135 grades are provided according to the degree of interruption or vibration during machining

### Turning Grade Comparison Chart for Stainless Steel

ISO	KORLOY	Competitor A	Competitor B	Competitor C	Competitor D	Competitor E	Competitor F	Competitor G
M15	NC9115	TT9215	GC2015	CA6515	MC7015	TM2000	WAM10	AC610M
M25	NC9125	TT9225	GC2025	CA6525	MC7025	TM4000	WAM20	AC6030M
M35	NC9135	TT9235	GC235	-	US735	-	WAM30	AC630M

### Turning Chip Breaker Comparison Chart for Stainless Steel (Negative type)

Application	KORLOY		Competitor A	Competitor B	Competitor C	Competitor D	Competitor E	Competitor F	Competitor G
	Main	Sub							
Rough cutting	RM	GS	ET	MR	MU	RM	M5	NR7	MU
Medium cutting	MM	HS	EM	MM	MS	MM	MF3	NM4	GU
Finish cutting	-	HA	EA	MF	-	LM	MF1	NS4	SU

### Turning Chip Breaker Comparison Chart for Stainless Steel (Positive type)

Application	KORLOY	Competitor A	Competitor B	Competitor C	Competitor D	Competitor E	Competitor F	Competitor G
Medium cutting	MP	PC, MT	MM	HQ	MV	MF2	PS5	MU
Finish cutting	VL	FA	MF	MQ	FV	FF1	PF4	SU



## Application Examples



### Hydraulics part (Mechanical seal)

- Workpiece X5CrNi18-9
- Cutting conditions  $vc(m/min) = 140$ ,  $fn(mm/rev) = 0.28$ ,  $ap(mm) = 3.0$ , wet
- Tools Insert CNMG120408-MM (NC9125)  
Holder S32S-PCLCR-12

MM (NC9125)

9ea/edge

Competitor A (M25)

5ea/edge

80%  
more

➔ Stable chip evacuation reduces cutting load and plastic deformation, which increases tool life 80% longer tool life than competitor A (M25)



### Valve part (Piston valve)

- Workpiece X5CrNi18-9 (Solution treatment)
- Cutting conditions  $vc(m/min) = 140$ ,  $fn(mm/rev) = 0.28$ ,  $ap(mm) = 3.0$ , wet
- Tools Insert CNMG120408-MM (NC9125)  
Holder DCLNL2525-M12

MM (NC9125)

5ea/edge

Competitor B (M25)

2ea/edge

150%  
more

➔ Dual land design combines sharp cutting performance and high toughness in high hardness machining 150% longer tool life than competitor B (M25)



### Wind power/offshore plant part (Flange)

- Workpiece X6CrNiNb18-10\* (Outer diameter roughing)
- Cutting conditions  $vc(m/min) = 150$ ,  $fn(mm/rev) = 0.3\sim0.5$ ,  $ap(mm) = 4.0\sim6.0$ , wet
- Tools Insert CNMG160616-MM (NC9125)  
Holder PCLNR3232-P16

MM (NC9125)

15ea/edge

Competitor C (M25)

10ea/edge

50%  
more

➔ 50% longer tool life than competitor C (M25)



### Wind power/offshore plant part (Flange)

- Workpiece X6CrNiNb18-10\* (Inner diameter finishing)
- Cutting conditions  $vc(m/min) = 175$ ,  $fn(mm/rev) = 0.45$ ,  $ap(mm) = \sim 1.0$ , wet
- Tools Insert SNMG190616-MM (NC9125)  
Holder S50U-PCLCR-19

MM (NC9125)

12ea/edge

Competitor D (M25)

8ea/edge

50%  
more

➔ 50% longer tool life than competitor D (M25)

\* Germany [DIN]

## Application Examples



### Wind power plant part (Flange)

- Workpiece X5CrNiMo17-12-2
- Cutting conditions  $vc(m/min) = 175$ ,  $fn(mm/rev) = 0.3 \sim 0.8$ ,  $ap(mm) = 0.5$ , wet
- Tools Insert TNMG220416-RM (NC9135)  
Holder PTFNR3232-P22

RM (NC9135)

5ea/edge

Competitor E (M35)

2ea/edge

150%  
more

➔ Extended tool life from improved chipping resistance and reduced built-up edge  
150% longer tool life than competitor E (M35)



### Plant part (Flange)

- Workpiece Super Duplex
- Cutting conditions  $vc(m/min) = 100$ ,  $fn(mm/rev) = 0.5$ ,  $ap(mm) = 3$ , wet
- Tools Insert CNMG160616-MM (NC9125)  
Holder PCLNR3232-P16

MM (NC9125)

12ea/edge

Competitor F (M25)

8ea/edge

50%  
more

➔ Extended tool life from inhibited wear and chipping  
50% longer tool life than competitor F (M25)



### Hydraulics part

- Workpiece Duplex
- Cutting conditions  $vc(m/min) = 120$ ,  $fn(mm/rev) = 0.4$ ,  $ap(mm) = 6$ , wet
- Tools Insert CNMG160616-RM (NC9125)  
Holder DCLNR3232-P16

RM (NC9125)

7ea/edge

Competitor G (M25)

5ea/edge

40%  
more

➔ Improved blade stability compared to competitor's  
40% longer tool life than competitor G (M25)



### Machinery part

- Workpiece X5CrNi18-9
- Cutting conditions  $vc(m/min) = 180$ ,  $fn(mm/rev) = 0.4$ ,  $ap(mm) = 1.5$ , wet
- Tools Insert CNMG120408-MM (NC9125)  
Holder DCLNL2525-M12

MM (NC9125)

6ea/edge



VM (PC9030)





3ea/edge

100%  
more




➔ Extended tool life from superior resistance to built-up edge and wear compared to PC9030  
100% higher productivity than PC9030 under higher cutting conditions





## ➤ Available Stock [Negative type]

Insert shape	Designation		Application	Stock		
				NC9115	NC9125	NC9135
	CNMG	120408-MM	Medium cutting	●	●	●
		120412-MM		●	●	●
		120404-MP		●	●	●
		120408-MP		●	●	●
		120412-MP		●	●	●
		120416-MP		●	●	●
		160608-MP		●	●	●
		160612-MP		●	●	●
		190616-MP		●	●	●
		120408-RM	Rough cutting	●	●	●
		120412-RM		●	●	●
	DNMG	150408-MM	Medium cutting	●	●	●
		150412-MM		●	●	●
		150608-MM		●	●	●
		150612-MM		●	●	●
		150404-MP		●	●	●
		150408-MP		●	●	●
		150412-MP		●	●	●
		150604-MP		●	●	●
		150608-MP		●	●	●
		150612-MP		●	●	●
		150408-RM	Rough cutting	●	●	●
		150412-RM		●	●	●
		150608-RM		●	●	●
		150612-RM		●	●	●

Insert shape	Designation		Application	Stock		
				NC9115	NC9125	NC9135
	SNMG	120404-MM	Medium cutting	●	●	●
		120408-MM		●	●	●
		120404-MP		●	●	●
		120408-MP		●	●	●
		120412-MP		●	●	●
		120404-RM	Rough cutting	●	●	●
		120408-RM		●	●	●
	TNMG	160404-MM	Medium cutting	●	●	●
		160408-MM		●	●	●
		160404-MP		●	●	●
		160408-MP		●	●	●
		160412-MP		●	●	●
		220404-MP		●	●	●
		220408-MP		●	●	●
		220412-MP		●	●	●
		160404-RM	Rough cutting	●	●	●
		160408-RM		●	●	●
	VNMG	160404-MP	Medium cutting	●	●	●
		160408-MP	Medium cutting	●	●	●
	WNMG	080408-MM	Medium cutting	●	●	●
		080412-MM		●	●	●
		080404-MP		●	●	●
		080408-MP		●	●	●
		080412-MP	Rough cutting	●	●	●
		080408-RM		●	●	●
		080412-RM		●	●	●

## ➤ Available Stock [Positive type]

Insert shape	Designation		Application	Stock		
				NC9115	NC9125	NC9135
	CCMT	060204-VL	Finishing	●	●	●
		09T304-VL		●	●	●
		09T308-VL		●	●	●
		060202-MP	Medium cutting	●	●	●
		060204-MP		●	●	●
		09T302-MP		●	●	●
		09T304-MP		●	●	●
		09T308-MP		●	●	●
	DCMT	070204-VL	Finishing	●	●	●
		11T304-VL		●	●	●
		11T308-VL		●	●	●
		070202-MP	Medium cutting	●	●	●
		070204-MP		●	●	●
		070208-MP		●	●	●
		11T302-MP		●	●	●
		11T304-MP		●	●	●
		11T308-MP		●	●	●
	SCMT	09T304-VL	Finishing	●	●	●
		09T308-VL	Finishing	●	●	●
		09T304-MP	Medium cutting	●	●	●
		09T308-MP		●	●	●
		120408-MP		●	●	●

Insert shape	Designation		Application	Stock		
				NC9115	NC9125	NC9135
	TCMT	16T304-VL	Finishing	●	●	●
		16T308-VL		●	●	●
		090204-MP	Medium cutting	●	●	●
		090208-MP		●	●	●
		110202-MP		●	●	●
		110204-MP		●	●	●
		110208-MP		●	●	●
		16T304-MP		●	●	●
		16T308-MP		●	●	●
		16T312-MP		●	●	●
	TPMT	110304-VL	Finishing	●	●	●
	VBMT	160404-VL	Finishing	●	●	●
		160408-VL		●	●	●
		160412-VL	Medium cutting	●	●	●
		160404-MP		●	●	●
		160408-MP		●	●	●
		160412-MP		●	●	●
	VCMT	160404-VL	Finishing	●	●	●
		160408-VL		●	●	●
		160404-MP	Medium cutting	●	●	●
		160408-MP		●	●	●
		160412-MP		●	●	●

***www.korloy.com***



**KORLOY**

Holystar B/D, 1350, Nambusunhwan-ro, Geumcheon-gu, Seoul, 08536, Korea

Tel : +82-2-522-3181 Fax : +82-2-522-3184, +82-2-3474-4744 Web : [www.korloy.com](http://www.korloy.com) E-mail : [export@korloy.com](mailto:export@korloy.com)



**KORLOY AMERICA**

620 Maple Avenue, Torrance, CA 90503, USA

Tel : +1-310-782-3800 Toll Free : +1-888-711-0001 Fax : +1-310-782-3885

[www.korloyamerica.com](http://www.korloyamerica.com) E-mail : [sales@korloy.us](mailto:sales@korloy.us)



**KORLOY EUROPE**

Gablonzer Str. 25-27, 61440 Oberursel, Germany

Tel : +49-6171-277-83-0 Fax : +49-6171-277-83-59

[www.korloyeurope.com](http://www.korloyeurope.com) E-mail : [sales@korloyeurope.com](mailto:sales@korloyeurope.com)



**KORLOY INDIA**

Plot NO.415, Sector 8, IMT Manesar, Gurgaon 122051, Haryana, INDIA

Tel : +91-124-4391790 Fax : +91-124-4050032

[www.korloyindia.com](http://www.korloyindia.com) E-mail : [sales.kip@korloy.com](mailto:sales.kip@korloy.com)



**KORLOY BRASIL**

Av. Aruana 280, conj.12, WLC, Alphaville, Barueri,

CEP06460-010, SP, Brasil

Tel : +55-11-4193-3810 E-mail : [vendas@korloy.com](mailto:vendas@korloy.com)